



VALUE AT THE SPINDLE

Series ZR
High Performance End Mills

Z-CARB X PR



www.kyocera-sgstool.com

ISO 9001:2015 Certified

Z-CARB X PR

GET AGGRESSIVE MAINTAIN PRECISION


High Performance Milling with Extreme Plunging and Ramping Capabilities

The new plunging and ramping end mill is designed to excel in advanced axial workpiece entry techniques, including plunging, ramping, and helical interpolation, thanks to its unique end teeth design. This innovative feature, combined with completely variable geometry, allows for increased speeds and feeds while minimizing chatter and resonant vibrations, resulting in smoother and more efficient machining operations. The universal geometry of this end mill makes it suitable for use across a wide range of material groups, providing versatility in various applications and maintains excellent performance in slotting, advanced roughing, general roughing, semi-finishing, and finishing operations.



IDEAL FOR HIGH-EFFICIENCY ROUGHING AND FINISHING IN THE FOLLOWING **TARGET MATERIALS:**

P	STEEL	S	TITANIUM ALLOYS
M	STAINLESS STEEL	S	HEAT-RESISTANT ALLOYS
K	CAST IRON	H	HARDENED STEEL ($\leq 45\text{HRC}$)



View Online



Watch Video

FEATURES

OPEN END TOOTH DESIGN

Facilitates smooth and efficient chip evacuation when used in axial applications such as plunging, ramping, and helical interpolation

END TEETH WIPER FLAT

Increases corner strength and significantly improves workpiece floor surface finish

VARIABLE HELIX, RAKE, AND FLUTE INDEXING

Eliminates harmonics, suppresses chatter, produces ideal chip shape, and controls cutting zone temperature

SPECIALIZED FLUTE SHAPE

Provides excellent chip evacuation up to 2xD depth of cut

PROPRIETARY PVD COATING TECHNOLOGY

Provides exceptionally long tool life in a wide range of material applications

PREMIUM CARBIDE SUBSTRATE


Balances toughness and hardness

COMPREHENSIVE OFFERING

- Available in metric and imperial sizes
- Square corner and popular corner radii
- Weldon flat in select configurations
- Available in **MEGACOAT NANO** or **Ti-NAMITE-X** coatings for a variety of applications

Achieves excellent surface finish with specialized wiper edge design


Wipers

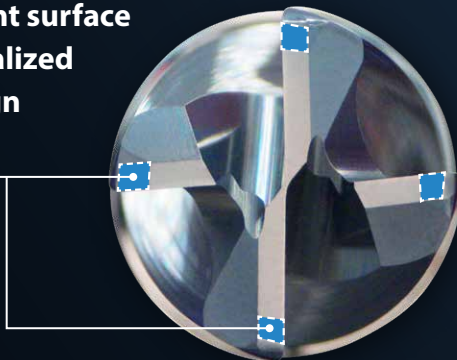

Finish Comparison (Internal Evaluation)

Competitor A

Z-CARB X PR

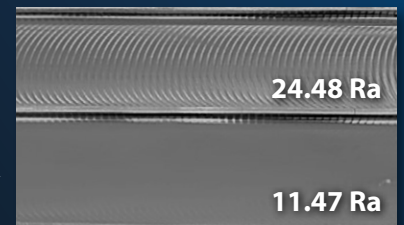

17-4 Stainless Steel


INNOVATIVE COATINGS DESIGNED FOR THE ULTIMATE PROTECTION AND ENDURANCE

MEGACOAT NANO NEW

The nano-layers of this coating provide high hardness for exceptional wear resistance and high oxidation resistance that allows for operation at high temperatures. The layered structure also gives the coating the toughness required to resist chipping. MEGACOAT NANO is particularly effective in high efficiency machining applications.




Coating Properties (Abrasion Resistance)

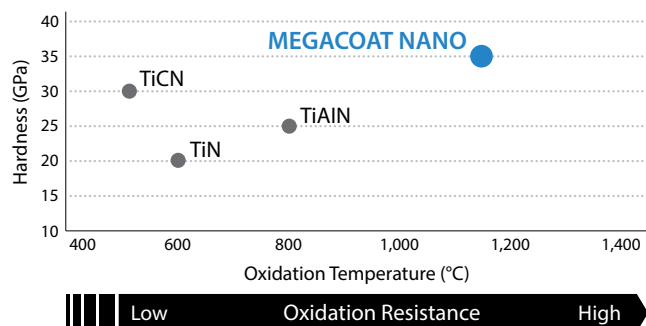

Achieves long tool life with special Nano coating layer


Coating Properties (Deposition Resistance)

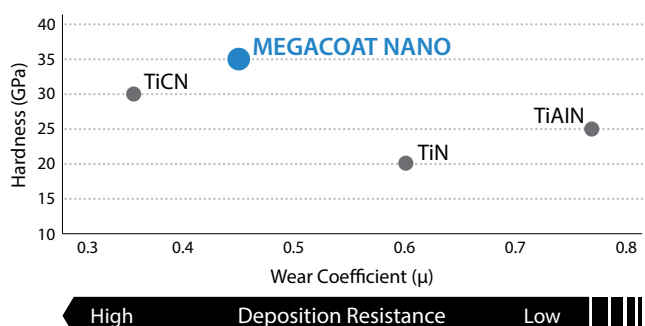

Stable machining with excellent wear resistance

Ti-NAMITE-X

Meets a diverse range of applications from high- and low-alloy steels to hardened materials. Ti-NAMITE-X is suitable for operations which require high cutting speeds, high temperatures at the cutting edge, and high metal removal rates.

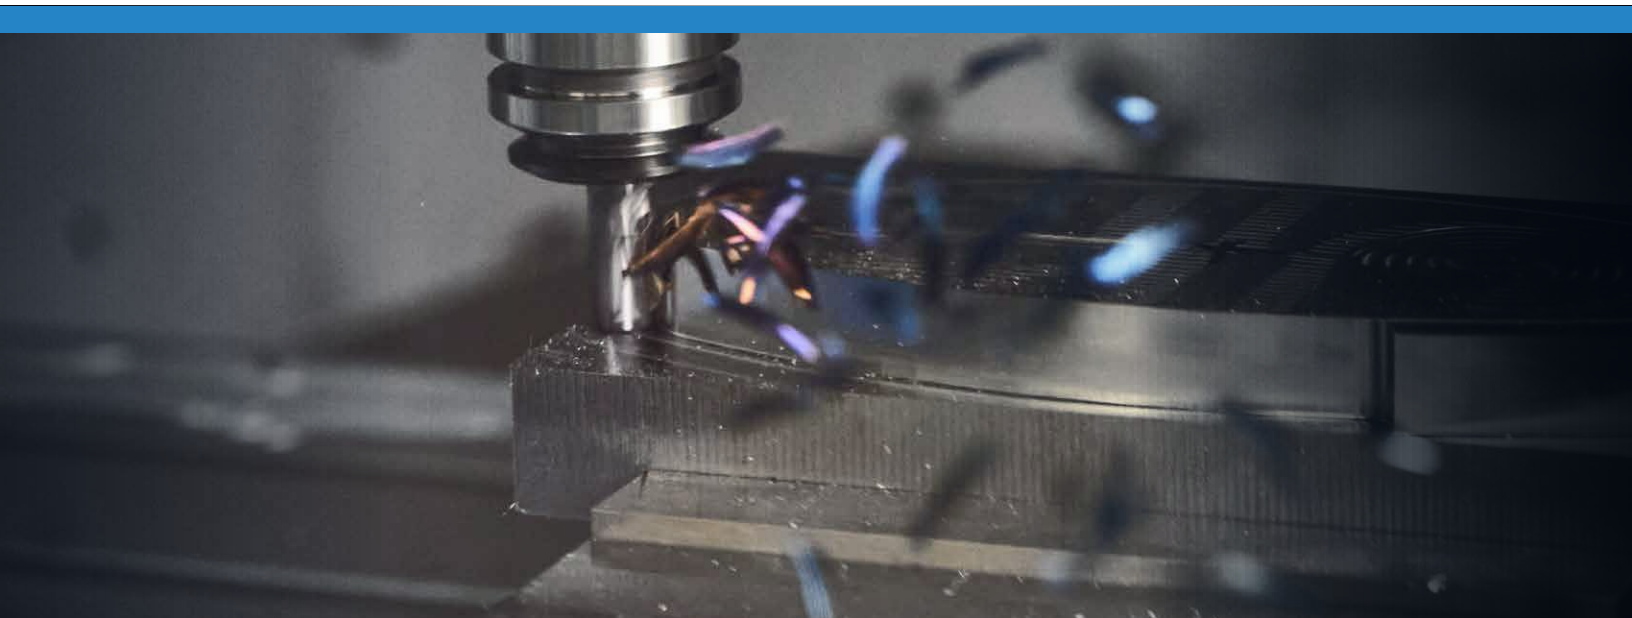

CUSTOMER SUCCESS

Total Cost Savings: **\$121,738**

INDUSTRY

Firearms

MATERIAL

4140 Steel (Forged)

PRODUCT

Z-Carb XPR 4-Flute Corner Radius

Ti-NAMITE-X (TX) Coated End Mill

APPLICATION

Milling

COMPETITOR TOOLS

0.500" 4-Flute Solid End Mill

COOLANT

Flood

SGS TOOL INFORMATION

0.500" Cutting Dia. (DC)

1.250" Length of Cut

3.250" Overall Length

EDP: 39871

GOALS

This firearm manufacturer needed to produce 200,000 total parts annually. With the annual job cost exceeding \$726,000, their goal was to reduce the overall cost by lowering cycle time and extending tool life. To achieve this goal, KYOCERA SGS application engineers looked for ways to increase tool life and decrease cost per part.

STRATEGY


The existing application utilized a 1/2" 4-flute end mill to plunge and slot (blind) into the steel firearms component with a 2:57 (min/sec) cycle time per part and 95 cycles per tool. The new strategy increased feed rate with the Z-Carb XPR 4-flute end mill with aggressive plunging and ramping capabilities.

	Z-Carb XPR End Mill	Competitor End Mill
Cutting Diameter (DC)	0.500"	0.500"
RPM	3200	4500
SFM	419.20	589.50
Feed (IPM)	39.0	27.9
IPR	0.0122	0.0062
RADIAL DEPTH (AE)	0.500"	0.500"
AXIAL DEPTH (AP)	0.800"	0.800"

RESULTS


Using the SGS Z-Carb XPR 4-flute end mill with a Ti-NAMITE-X (TX) coating, the customer saw drastic tool life improvements and was able to double the amount of cycles per tool. While cycle time was only reduced by 1sec, the Z-Carb XPR's tool life lasted twice as long, showing only minimal wear compared to the competitor's end mill resulting in 50% annual savings in total new tool cost. These changes resulted in a 13% reduction in total costs and annual savings of over **\$121,000**.

Tools Required

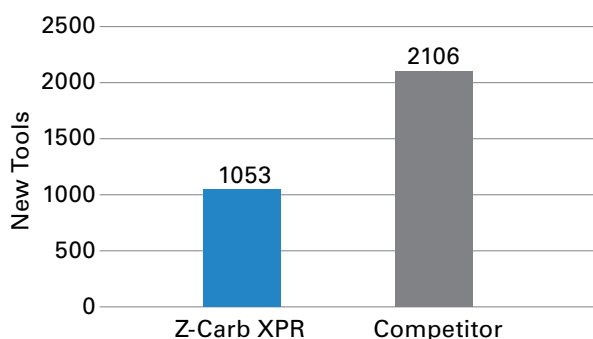



Total New Tool Cost

*Based on list price

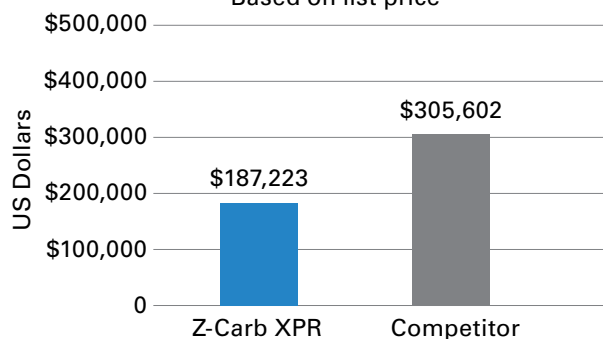

Total Machining Cost

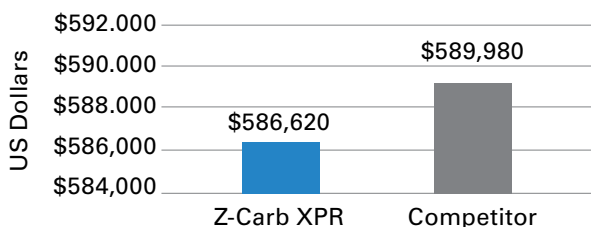

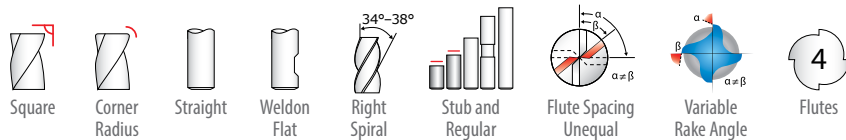


TOLERANCES (inch)


DIAMETER	DC	DCON
1/4	+0.0000 / -0.0012	h6
> 1/4 - 3/8	+0.0000 / -0.0016	h6
> 3/8 - 3/4	+0.0000 / -0.0020	h6

CORNER RADIUS TOLERANCES (inch)

RE = +0.0000 / -0.0020

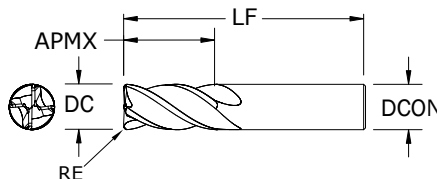


Dimensions (in)					EDP Numbers by Coating and Type			
Cutting Diameter	Length of Cut	Overall Length	Shank Diameter	Corner Radius	Ti-NAMITE®-X (TX)		MEGACOAT NANO (MN)	
DC	APMX	LF	DCON	RE	Standard	Weldon Flat	Standard	Weldon Flat
1/4	1/2	2-1/2	1/4	—	39802	—	39800	—
1/4	1/2	2-1/2	1/4	0.010	39806	—	39804	—
1/4	1/2	2-1/2	1/4	0.015	39810	—	39808	—
1/4	1/2	2-1/2	1/4	0.020	39814	—	39812	—
1/4	1/2	2-1/2	1/4	0.030	39818	—	39816	—
1/4	3/4	2-1/2	1/4	—	39803	—	39801	—
1/4	3/4	2-1/2	1/4	0.010	39807	—	39805	—
1/4	3/4	2-1/2	1/4	0.015	39811	—	39809	—
1/4	3/4	2-1/2	1/4	0.020	39815	—	39813	—
1/4	3/4	2-1/2	1/4	0.030	39819	—	39817	—
5/16	13/16	2-1/2	5/16	—	39821	—	39820	—
5/16	13/16	2-1/2	5/16	0.015	39823	—	39822	—
5/16	13/16	2-1/2	5/16	0.020	39825	—	39824	—
5/16	13/16	2-1/2	5/16	0.030	39827	—	39826	—
3/8	5/8	2	3/8	0.020	39839	—	39836	—
3/8	7/8	2-1/2	3/8	—	39830	39831	39828	39829
3/8	7/8	2-1/2	3/8	0.010	39833	—	39832	—
3/8	7/8	2-1/2	3/8	0.015	39835	—	39834	—
3/8	7/8	2-1/2	3/8	0.020	39840	39841	39837	39838
3/8	7/8	2-1/2	3/8	0.030	39844	39845	39842	39843
3/8	7/8	2-1/2	3/8	0.060	39848	39849	39846	39847
7/16	1	2-3/4	7/16	—	39851	—	39850	—
7/16	1	2-3/4	7/16	0.020	39853	—	39852	—
1/2	5/8	2-1/2	1/2	0.030	39877	—	39872	—
1/2	1	3	1/2	—	39858	39859	39854	39855
1/2	1	3	1/2	0.010	39864	—	39862	—
1/2	1	3	1/2	0.015	39869	39870	39866	39867
1/2	1	3	1/2	0.030	39878	39879	39873	39874
1/2	1	3	1/2	0.060	39884	—	39882	—
1/2	1-1/4	3-1/4	1/2	—	39860	39861	39856	39857
1/2	1-1/4	3-1/4	1/2	0.010	39865	—	39863	—
1/2	1-1/4	3-1/4	1/2	0.015	39871	—	39868	—
1/2	1-1/4	3-1/4	1/2	0.030	39880	39881	39875	39876
1/2	1-1/4	3-1/4	1/2	0.060	39885	—	39883	—
9/16	1-1/8	3-1/2	9/16	—	39887	—	39886	—
9/16	1-1/8	3-1/2	9/16	0.030	39889	—	39888	—
5/8	1-1/4	3-1/2	5/8	—	39892	39893	39890	39891
5/8	1-1/4	3-1/2	5/8	0.030	39896	39897	39894	39895
5/8	1-1/4	3-1/2	5/8	0.040	39900	39901	39898	39899
5/8	1-1/4	3-1/2	5/8	0.060	39903	—	39902	—
3/4	1-1/2	4	3/4	—	39905	—	39904	—
3/4	1-1/2	4	3/4	0.030	39907	—	39906	—
3/4	1-1/2	4	3/4	0.040	39909	—	39908	—
3/4	1-1/2	4	3/4	0.060	39911	—	39910	—
3/4	1-1/2	4	3/4	0.125	39913	—	39912	—

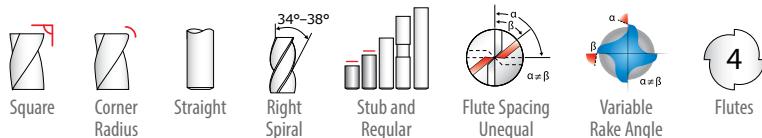**TOLERANCES (mm)**


DIAMETER	DC	DCON
6	+0,000 / -0,030	h6
> 6 - 10	+0,000 / -0,040	h6
> 10 - 20	+0,000 / -0,050	h6

CORNER RADIUS TOLERANCES (mm)

RE = +0,000 / -0,020

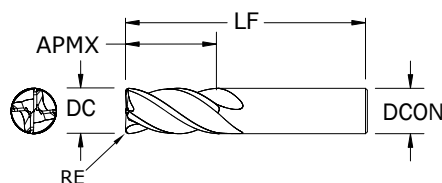


Dimensions (mm)					EDP Numbers by Coating and Type	
Cutting Diameter	Length of Cut	Overall Length	Shank Diameter	Corner Radius	Ti-NAMITE®-X (TX)	MEGACOAT NANO (MN)
DC	APMX	LF	DCON	RE	Standard	Standard
6,0	13,0	57,0	6,0	–	47801	47800
6,0	13,0	57,0	6,0	0,50	47803	47802
6,0	13,0	57,0	6,0	1,00	47805	47804
8,0	19,0	63,0	8,0	–	47807	47806
8,0	19,0	63,0	8,0	0,50	47809	47808
8,0	19,0	63,0	8,0	1,00	47811	47810
8,0	19,0	63,0	8,0	2,00	47813	47812
10,0	22,0	72,0	10,0	–	47815	47814
10,0	22,0	72,0	10,0	0,50	47817	47816
10,0	22,0	72,0	10,0	1,00	47819	47818
10,0	22,0	72,0	10,0	2,00	47821	47820
12,0	26,0	83,0	12,0	–	47823	47822
12,0	26,0	83,0	12,0	0,50	47825	47824
12,0	26,0	83,0	12,0	0,75	47829	47828
12,0	26,0	83,0	12,0	1,00	47831	47830
14,0	26,0	83,0	14,0	–	47833	47832
14,0	26,0	83,0	14,0	1,00	47835	47834
16,0	32,0	92,0	16,0	–	47837	47836
16,0	32,0	92,0	16,0	1,00	47839	47838
16,0	32,0	92,0	16,0	2,00	47841	47840
16,0	32,0	92,0	16,0	3,00	47843	47842
20,0	38,0	104,0	20,0	–	47845	47844
20,0	38,0	104,0	20,0	1,00	47847	47846



Series ZR		Ae		Vc							
Fractional	Hardness	Ae x DC	Ap x DC	(sfm)	1/4	3/8	1/2	5/8	3/4		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile	≤ 0.25	≤ APMX	675 (540-810)	RPM	10314	6876	5157	4126	3438
						Fz	0.0017	0.0029	0.0041	0.0045	0.0048
						Feed (ipm)	70	80	85	73	66
		 Slot	1	≤ 1	450 (360-540)	RPM	6876	4584	3438	2750	2292
						Fz	0.0014	0.0025	0.0035	0.0039	0.0042
						Feed (ipm)	39	45	48	42	39
		 Plunge	1	≤ 1	640 (512-768)	RPM	9779	6519	4890	3912	3260
						Fz	0.0013	0.0022	0.0032	0.0035	0.0038
						Feed (ipm)	49	58	62	54	49
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile	≤ 0.25	≤ APMX	525 (420-630)	RPM	8022	5348	4011	3209	2674
						Fz	0.0011	0.0024	0.0036	0.0039	0.0042
						Feed (ipm)	35	50	58	50	45
		 Slot	1	≤ 1	350 (280-420)	RPM	5348	3565	2674	2139	1783
						Fz	0.0010	0.0021	0.0031	0.0034	0.0037
						Feed (ipm)	21	29	33	29	26
		 Plunge	1	≤ 1	500 (400-600)	RPM	7640	5093	3820	3056	2547
						Fz	0.0009	0.0019	0.0028	0.0031	0.0033
						Feed (ipm)	28	38	43	38	34
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile	≤ 0.25	≤ APMX	240 (192-288)	RPM	3667	2445	1834	1467	1222	
					Fz	0.0009	0.0018	0.0026	0.0030	0.0033	
					Feed (ipm)	13	17	19	17	16	
	 Slot	1	≤ 0.5	160 (128-192)	RPM	2445	1630	1222	978	815	
					Fz	0.0008	0.0016	0.0023	0.0026	0.0028	
					Feed (ipm)	8	10	11	10	9	
	 Plunge	1	≤ 0.5	220 (176-264)	RPM	3362	2241	1681	1345	1121	
					Fz	0.0007	0.0014	0.0021	0.0023	0.0025	
					Feed (ipm)	10	13	14	12	11	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 0.25	≤ APMX	540 (432-648)	RPM	8251	5501	4126	3300	2750
						Fz	0.0011	0.0022	0.0032	0.0035	0.0038
						Feed (ipm)	36	47	53	46	42
		 Slot	1	≤ 1	360 (288-432)	RPM	5501	3667	2750	2200	1834
						Fz	0.0010	0.0019	0.0028	0.0031	0.0033
						Feed (ipm)	22	28	31	27	24
		 Plunge	1	≤ 1	510 (408-612)	RPM	7793	5195	3896	3117	2598
						Fz	0.0009	0.0017	0.0025	0.0028	0.0030
						Feed (ipm)	28	36	39	34	31
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	 Profile	≤ 0.25	≤ APMX	375 (300-450)	RPM	5730	3820	2865	2292	1910
						Fz	0.0009	0.0018	0.0026	0.0030	0.0034
						Feed (ipm)	21	27	30	28	26
		 Slot	1	≤ 0.5	250 (200-300)	RPM	3820	2547	1910	1528	1273
						Fz	0.0008	0.0016	0.0023	0.0026	0.0029
						Feed (ipm)	12	16	18	16	15
		 6° Ramp	1	≤ 0.5	350 (280-420)	RPM	5348	3565	2674	2139	1783
						Fz	0.0007	0.0014	0.0021	0.0023	0.0026
						Feed (ipm)	15	20	22	20	19
STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	 Profile	≤ 0.25	≤ APMX	360 (288-432)	RPM	5501	3667	2750	2200	1834	
					Fz	0.0009	0.0018	0.0026	0.0030	0.0034	
					Feed (ipm)	20	26	29	26	25	
	 Slot	1	≤ 1	240 (192-288)	RPM	3667	2445	1834	1467	1222	
					Fz	0.0008	0.0016	0.0023	0.0026	0.0029	
					Feed (ipm)	12	15	17	15	14	
	 6° Ramp	1	≤ 1	340 (272-408)	RPM	5195	3463	2598	2078	1732	
					Fz	0.0007	0.0014	0.0021	0.0023	0.0026	
					Feed (ipm)	15	19	22	20	18	


Continued on next page



Series ZR Fractional		Hardness			Vc (sfm)							
			Ae x DC	Ap x DC		1/4	3/8	1/2	5/8	3/4		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRC	Profile 	≤ 0.25	≤ APMX	630 (504-756)	RPM	9626	6418	4813	3851	3209
						Fz	0.0013	0.0023	0.0033	0.0038	0.0042	
			Slot 	1	≤ 1	420 (336-504)	RPM	6418	4278	3209	2567	2139
						Fz	0.0011	0.0020	0.0029	0.0033	0.0037	
			Plunge 	1	≤ 1	600 (480-720)	RPM	9168	6112	4584	3667	3056
						Fz	0.0010	0.0018	0.0026	0.0030	0.0033	
				Feed (ipm)	36	44	48	44	41			
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRC	Profile 	≤ 0.25	≤ APMX	375 (300-450)	RPM	5730	3820	2865	2292	1910
						Fz	0.0009	0.0018	0.0026	0.0030	0.0034	
			Slot 	1	≤ 1	250 (200-300)	RPM	3820	2547	1910	1528	1273
						Fz	0.0008	0.0016	0.0023	0.0026	0.0029	
			Plunge 	1	≤ 1	350 (280-420)	RPM	5348	3565	2674	2139	1783
					Fz	0.0007	0.0014	0.0021	0.0023	0.0026		
			Feed (ipm)	15	20	22	20	19				
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRC	Profile 	≤ 0.25	≤ APMX	105 (84-126)	RPM	1604	1070	802	642	535
						Fz	0.0006	0.0013	0.0019	0.0023	0.0026	
			Slot 	1	≤ 0.375	70 (56-84)	RPM	1070	713	535	428	357
						Fz	0.0005	0.0011	0.0017	0.0020	0.0022	
			3° Ramp 	1	≤ 0.5	100 (80-120)	RPM	1528	1019	764	611	509
						Fz	0.0005	0.0010	0.0015	0.0018	0.0020	
				Feed (ipm)	3	4	5	4	4			
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRC	Profile 	≤ 0.25	≤ APMX	60 (48-72)	RPM	917	611	458	367	306
						Fz	0.0006	0.0011	0.0016	0.0020	0.0024	
			Slot 	1	≤ 0.375	40 (32-48)	RPM	611	407	306	244	204
						Fz	0.0005	0.0010	0.0014	0.0018	0.0021	
			3° Ramp 	1	≤ 0.5	50 (40-60)	RPM	764	509	382	306	255
						Fz	0.0005	0.0009	0.0013	0.0016	0.0019	
				Feed (ipm)	1	2	2	2	2			
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRC	Profile 	≤ 0.25	≤ APMX	270 (216-324)	RPM	4126	2750	2063	1650	1375
						Fz	0.0010	0.0019	0.0027	0.0032	0.0036	
			Slot 	1	≤ 0.5	180 (144-216)	RPM	2750	1834	1375	1100	917
						Fz	0.0009	0.0017	0.0024	0.0028	0.0031	
			6° Ramp 	1	≤ 0.5	250 (200-300)	RPM	3820	2547	1910	1528	1273
						Fz	0.0008	0.0015	0.0022	0.0025	0.0028	
				Feed (ipm)	12	15	17	15	14			
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRC	Profile 	≤ 0.25	≤ APMX	150 (120-180)	RPM	2292	1528	1146	917	764
						Fz	0.0009	0.0017	0.0025	0.0030	0.0034	
			Slot 	1	≤ 0.375	100 (80-120)	RPM	1528	1019	764	611	509
					Fz	0.0008	0.0015	0.0022	0.0026	0.0030		
6° Ramp 			1	≤ 0.5	140 (112-168)	RPM	2139	1426	1070	856	713	
					Fz	0.0007	0.0014	0.0020	0.0023	0.0027		
			Feed (ipm)	6	8	9	8	8				

Note:


- Bhn (Brinell) HRc (Rockwell C)
- rpm = Vc x 3.82 / DC
- ipm = Fz x 4 x rpm
- Reduce speed and feed for materials harder than listed
- Reduce feed and Ae when finish milling (.02 x DC maximum)
- Refer to the KYOCERA SGS APEX® for complete technical information (www.kyocera-sgstool.com)



Series ZR Metric	Hardness		Ae x DC	Ap x DC	Vc (m/min)	DC • mm							
						6	8	10	12	16	20		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.25	≤ APMX	206 (165-247)	RPM	10920	8190	6552	5460	4095	3276
			Fz	0.0464	0.0668	0.0870	0.1071	0.1247	0.1376				
			Feed (mm/min)	2025	2189	2280	2338	2043	1803				
		Slot	1	≤ 1	137 (110-165)	RPM	7280	5460	4368	3640	2730	2184	
		Fz	0.0365	0.0526	0.0685	0.0843	0.0982	0.1083					
		Feed (mm/min)	1063	1149	1197	1227	1072	946					
		Plunge	1	≤ 1	195 (156-234)	RPM	10354	7765	6212	5177	3883	3106	
		Fz	0.0334	0.0482	0.0627	0.0772	0.0882	0.0992					
		Feed (mm/min)	1384	1496	1558	1598	1369	1232					
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile	≤ 0.25	≤ APMX	160 (128-192)	RPM	8493	6370	5096	4247	3185	2548
			Fz	0.0324	0.0518	0.0727	0.0932	0.1096	0.1207				
			Feed (mm/min)	1100	1320	1481	1584	1396	1230				
		Slot	1	≤ 1	107 (85-128)	RPM	5662	4247	3397	2831	2123	1699	
		Fz	0.0255	0.0408	0.0572	0.0734	0.0863	0.0950					
		Feed (mm/min)	578	693	777	831	733	645					
		Plunge	1	≤ 1	152 (122-183)	RPM	8089	6067	4853	4044	3033	2427	
		Fz	0.0233	0.0374	0.0524	0.0672	0.0771	0.0870					
		Feed (mm/min)	755	906	1017	1087	935	844					
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile	≤ 0.25	≤ APMX	73 (59-88)	RPM	3883	2912	2330	1941	1456	1165	
		Fz	0.0259	0.0396	0.0541	0.0685	0.0826	0.0935					
		Feed (mm/min)	402	462	504	532	481	436					
	Slot	1	≤ 0.5	49 (39-59)	RPM	2588	1941	1553	1294	971	777		
	Fz	0.0204	0.0312	0.0426	0.0539	0.0650	0.0736						
	Feed (mm/min)	211	242	265	279	252	229						
	Plunge	1	≤ 0.5	67 (54-80)	RPM	3559	2669	2135	1780	1335	1068		
	Fz	0.0187	0.0286	0.0390	0.0493	0.0584	0.0674						
	Feed (mm/min)	266	305	333	351	312	288						
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.25	≤ APMX	165 (132-198)	RPM	8736	6552	5242	4368	3276	2621
			Fz	0.0328	0.0488	0.0659	0.0829	0.0981	0.1090				
			Feed (mm/min)	1145	1278	1382	1449	1285	1142				
		Slot	1	≤ 1	110 (88-132)	RPM	5824	4368	3494	2912	2184	1747	
		Fz	0.0258	0.0384	0.0519	0.0653	0.0772	0.0858					
		Feed (mm/min)	601	671	725	761	674	600					
		Plunge	1	≤ 1	155 (124-187)	RPM	8251	6188	4950	4125	3094	2475	
		Fz	0.0236	0.0352	0.0475	0.0598	0.0692	0.0786					
		Feed (mm/min)	780	870	941	987	856	778					
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.25	≤ APMX	114 (91-137)	RPM	6067	4550	3640	3033	2275	1820
			Fz	0.0255	0.0390	0.0537	0.0683	0.0846	0.0979				
			Feed (mm/min)	620	710	782	829	770	713				
		Slot	1	≤ 0.5	76 (61-91)	RPM	4044	3033	2427	2022	1517	1213	
		Fz	0.0201	0.0307	0.0423	0.0538	0.0666	0.0771					
		Feed (mm/min)	325	372	411	435	404	374					
		6° Ramp	1	≤ 0.5	107 (85-128)	RPM	5662	4247	3397	2831	2123	1699	
		Fz	0.0184	0.0281	0.0387	0.0493	0.0599	0.0706					
		Feed (mm/min)	417	477	526	558	509	480					
STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	≤ 325 Bhn or ≤ 35 HRc	Profile	≤ 0.25	≤ APMX	110 (88-132)	RPM	5824	4368	3494	2912	2184	1747	
		Fz	0.0254	0.0390	0.0537	0.0683	0.0846	0.0979					
		Feed (mm/min)	592	681	751	796	739	684					
	Slot	1	≤ 1	73 (59-88)	RPM	3883	2912	2330	1941	1456	1165		
	Fz	0.0200	0.0307	0.0423	0.0538	0.0666	0.0771						
	Feed (mm/min)	311	358	394	418	388	359						
	6° Ramp	1	≤ 1	104 (83-124)	RPM	5500	4125	3300	2750	2063	1650		
	Fz	0.0183	0.0281	0.0387	0.0493	0.0599	0.0706						
	Feed (mm/min)	403	464	511	542	494	466						

Continued on next page



Series ZR Metric		Hardness			Vc (m/min)	DC • mm							
			Ae x DC	Ap x DC		6	8	10	12	16	20		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 Profile	≤ 0.25	≤ APMX	192 (154-230)	RPM	10192	7644	6115	5096	3822	3058
							Fz	0.0363	0.0526	0.0699	0.0869	0.1059	0.1218
							Feed (mm/min)	1481	1608	1709	1771	1619	1490
			 Slot	1	≤ 1	128 (102-154)	RPM	6795	5096	4077	3397	2548	2038
							Fz	0.0286	0.0414	0.0550	0.0684	0.0834	0.0959
							Feed (mm/min)	777	844	897	929	850	782
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	 Plunge	1	≤ 1	183 (146-219)	RPM	9707	7280	5824	4853	3640	2912
							Fz	0.0262	0.0379	0.0504	0.0626	0.0752	0.0878
							Feed (mm/min)	1017	1104	1173	1216	1095	1023
			 Profile	≤ 0.25	≤ APMX	114 (91-137)	RPM	6067	4550	3640	3033	2275	1820
							Fz	0.0255	0.0390	0.0537	0.0683	0.0846	0.0979
							Feed (mm/min)	620	710	782	829	770	713
S	SUPER ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	 Slot	1	≤ 0.375	76 (61-91)	RPM	4044	3033	2427	2022	1517	1213
							Fz	0.0201	0.0307	0.0423	0.0538	0.0666	0.0771
							Feed (mm/min)	325	372	411	435	404	374
			 Plunge	1	≤ 1	107 (85-128)	RPM	5662	4247	3397	2831	2123	1699
							Fz	0.0184	0.0281	0.0387	0.0493	0.0599	0.0706
							Feed (mm/min)	417	477	526	558	509	480
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	 Profile	≤ 0.25	≤ APMX	32 (26-38)	RPM	1699	1274	1019	849	637	510
							Fz	0.0174	0.0287	0.0413	0.0536	0.0650	0.0735
							Feed (mm/min)	118	146	168	182	166	150
			 Slot	1	≤ 0.375	21 (17-26)	RPM	1132	849	679	566	425	340
							Fz	0.0137	0.0226	0.0325	0.0422	0.0512	0.0579
							Feed (mm/min)	62	77	88	96	87	79
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 3° Ramp	1	≤ 0.5	30 (24-37)	RPM	1618	1213	971	809	607	485	
						Fz	0.0125	0.0207	0.0298	0.0386	0.0458	0.0530	
						Feed (mm/min)	81	100	116	125	111	103	
		 Profile	≤ 0.25	≤ APMX	18 (15-22)	RPM	971	728	582	485	364	291	
						Fz	0.0166	0.0271	0.0386	0.0500	0.0611	0.0695	
						Feed (mm/min)	65	79	90	97	89	81	
TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	 Slot	1	≤ 0.375	12 (10-15)	RPM	647	485	388	324	243	194	
						Fz	0.0131	0.0213	0.0304	0.0394	0.0481	0.0547	
						Feed (mm/min)	34	41	47	51	47	42	
		 3° Ramp	1	≤ 0.5	15 (12-18)	RPM	809	607	485	404	303	243	
						Fz	0.0120	0.0195	0.0278	0.0361	0.0431	0.0501	
						Feed (mm/min)	39	47	54	58	52	49	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 Profile	≤ 0.25	≤ APMX	82 (66-99)	RPM	4368	3276	2621	2184	1638	1310
							Fz	0.0286	0.0429	0.0577	0.0721	0.0894	0.1040
							Feed (mm/min)	499	563	605	630	586	545
			 Slot	1	≤ 0.5	55 (44-66)	RPM	2912	2184	1747	1456	1092	874
							Fz	0.0225	0.0338	0.0454	0.0568	0.0704	0.0819
							Feed (mm/min)	262	295	317	331	308	286
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	 6° Ramp	1	≤ 0.5	76 (61-91)	RPM	4044	3033	2427	2022	1517	1213
							Fz	0.0206	0.0309	0.0416	0.0520	0.0635	0.0750
							Feed (mm/min)	333	375	403	421	385	364
			 Profile	≤ 0.25	≤ APMX	46 (37-55)	RPM	2427	1820	1456	1213	910	728
							Fz	0.0243	0.0375	0.0512	0.0648	0.0837	0.1007
							Feed (mm/min)	235	273	298	314	305	293
			 Slot	1	≤ 0.375	30 (24-37)	RPM	1618	1213	971	809	607	485
							Fz	0.0191	0.0295	0.0403	0.0510	0.0659	0.0793
							Feed (mm/min)	124	143	156	165	160	154
			 6° Ramp	1	≤ 0.5	43 (34-51)	RPM	2265	1699	1359	1132	849	679
							Fz	0.0175	0.0270	0.0369	0.0467	0.0596	0.0726
							Feed (mm/min)	158	184	201	212	203	197

Note:

- Bhn (Brinell) HRC (Rockwell C)
- rpm = Vc x 3.82 / DC
- ipm = Fz x 4 x rpm
- Reduce speed and feed for materials harder than listed
- Reduce feed and Ae when finish milling (.02 x DC maximum)
- Refer to the KYOCERA SGS APEX® for complete technical information (www.kyocera-sgstool.com)

SOLUTIONS AROUND THE GLOBE

KYOCERA SGS Precision Tools is an ISO 9001:2015 Certified leader of round solid carbide cutting tool technology for the aerospace, metalworking, and automotive industries with manufacturing sites in the United States and United Kingdom. Our global network of Sales Representatives, Industrial Distributors, and Agents blanket the world selling into more than 60 countries.

LEADERS IN SOLID CARBIDE TOOL TECHNOLOGY

Brand names such as Z-Carb, S-Carb®, V-Carb, Hi-PerCarb®, Multi-Carb have become synonymous with high performance tooling in the machining and metalworking industry.

We're proud to have pioneered some of the world's most advanced cutting technology right here on our Northeast Ohio manufacturing campus. KSPT high performance end mills, drills and routers are increasing productivity and reducing cost around the world.

EXCEEDING CUSTOMER EXPECTATIONS

As the world's manufacturing needs change, so does KSPT. It's all about the science, starting with our lab inspected substrate materials to our tool designs and coatings. Our exceptional team of researchers, engineers, and machinists are dedicated to developing the absolute best and delivering the ultimate Value at the spindle®.

- Incredible batch-to-batch consistency
- Metallurgical lab dedicated to testing and rigorous quality control
- ISO 9001:2015 Certified quality procedures
- Patented geometries that extend tool life, reduce chatter, cut cycle times, and improve part quality—even at extreme parameters
- Specialists in extreme and demanding product applications
- Comprehensive tooling services
- Experienced Field Sales Engineers who work to optimize a tool for your particular application
- Dedicated multi-lingual customer service representatives

SGS PRODUCTS ARE DISTRIBUTED BY:



www.kyocera-sgstool.com



UNITED STATES OF AMERICA

KYOCERA SGS Precision Tools
150 Marc Drive
Cuyahoga Falls, Ohio 44223 U.S.A.
customer service -
US and Canada: (330) 686-5700
orders: sales@kyocera-sgstool.com
web: www.kyocera-sgstool.com

VALUE AT THE SPINDLE

UNITED KINGDOM

KYOCERA SGS Precision Tools Europe Ltd.
10 Ashville Way
Wokingham, Berkshire
RG41 2PL England
phone: (44) 1189-795-200
fax: (44) 1189-795-295
e-mail: SalesEU@kyocera-sgstool.com
web: www.kyocera-sgstool.co.uk

JAPAN

KYOCERA Corporation
International Sales Dept.
6 Takeda Tobadono-cho,
Fushimi-ku, Kyoto 612-8501, Japan
phone: +81-75-604-3473
fax: +81-75-604-3472
web: global.kyocera.com/prdct/tool/index.html

COMMERCIAL OFFICES

EASTERN EUROPE

SINTCOM
Sintcom Tools
95 Arsenalski Blvd.
1421 Sofia, Bulgaria
phone: (359) 283-64421
fax: (359) 286-52493
e-mail: sintcom@sintcomtools.com

FRANCE

DOGA-KSPTE FRANCE
8, Avenue Gutenberg
78310 Maurepas, France
phone: +33 (0) 1 30 66 41 64
fax: +33 (0) 1 30 66 41 49
e-mail: KSPTF@kyocera-sgstool.com
web: www.doga.fr

GERMANY

KADIGO Tool Systems GmbH
Walramster. 27
65510 Idstein, Germany
phone: +49-212-645573-0
fax: +49-212-38089693
e-mail: info@kadigo-ts.com

INDIA

KYOCERA Asia Pacific India Pvt. Ltd
Plot No.51, Phase-I,
Udyog Vihar Gurgaon 122016,
Haryana, India
phone: +91-124-4025022
fax: +91-124-4025001

KOREA

KYOCERA Precision Tools Korea Co., Ltd.
2LT 69BL, Namdong Industrial Estate,
638-1, Kozan-Dong, Namdong Incheon,
Korea
phone: +82-32-821-8365
fax: +82-32-821-8369
web: www.kptk.co.kr/

POLAND

KYOCERA SGS Precision Tools
phone: +48 530 432 002
e-mail: SalesEU@kyocera-sgstool.com

SPAIN

KYOCERA SGS Precision Tools IBERICA
e-mail: SalesEU@kyocera-sgstool.com

THAILAND

KYOCERA Asia Pacific (Thailand) Co., Ltd.
1 Capital Work Place Building
7th Floor, Soi Chamchan, Sukhumvit
55 Road, Klongton Nua, Wattana,
Bangkok 10110, Thailand
phone: +66-2-030-6688
fax: +66-2-030-6600

SINGAPORE

KYOCERA Asia Pacific Pte. Ltd.
298 Tiong Bahru Road, #13-03/05 Central Plaza,
Singapore 168730
phone: +65-6373-6700
fax: +65-6271-0600
web: asia.kyocera.com/products/cuttingtools/index.html

CHINA

KYOCERA (China) Sales & Trading Corporation
Room 140, Building A3, Daning Central Square,
No. 700 Wanrong Road,
Zhabei District, Shanghai, 200072,
P.R. China
phone: +86-21-3660-7711
fax: +86-21-568-6200
web: www.kyocera.com.cn/prdct/cuttingtool

